




## 1" NEO Dome Tweeter

<b>Program Power</b>	<b>150 W</b>
<b>Rated impedance</b>	<b>4 Ohm</b>
<b>Nominal diameter</b>	<b>1"- 26 mm</b>
<b>Sensitivity (2,83V/1m)</b>	<b>92,5 dB</b>
<b>Voice coil diameter</b>	<b>1 in - 26 mm</b>
<b>Frequency Range</b>	<b>2500-20000 Hz</b>



### SPECIFICATIONS

Nominal Diameter	1"- 26 mm
Rated Impedance	4 Ohm
Nominal Power Handling <sup>1</sup>	75 W
Program Power <sup>2</sup>	150 W
Sensitivity <sup>3</sup>	92,5 dB
Frequency Range <sup>4</sup>	2500-20000 Hz
Minimum Impedance	-
Flange material	Aluminium flange
Magnet Material	Neodymium
Diaphragm Material	Treated fabric soft dome
Diaphragm Shape	Dome
Surround	-
Voice Coil Diameter	1 in - 26 mm
Voice Coil Winding Material	Copper
Voice Coil Former Material	Aluminum
Flux Density	-
Ferrofluid	No
Connection type	-
Recommended Crossover Frequency	-

### FREQUENCY RESPONSE CURVE <sup>6</sup>

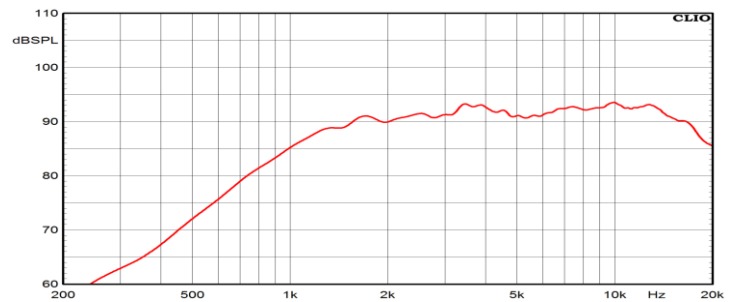

### FREE AIR IMPEDANCE CURVE <sup>7</sup>

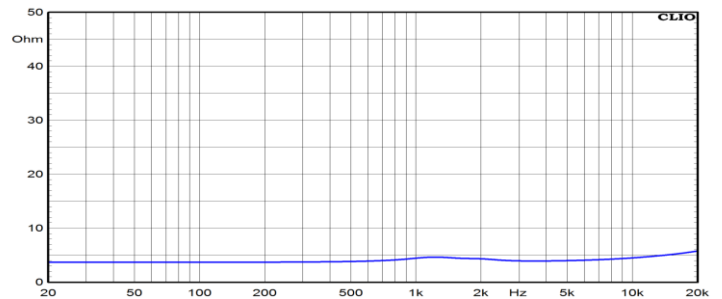

### T/S PARAMETERS

4 Ohm

Resonance frequency	Fs	1200 Hz
DC Resistance	Re	3,3 Ohm
Mechanical Q Factor	Qms	-
Electrical Q Factor	Qes	-
Total Q Factor	Qts	-
Bl Factor	Bl	-
Effective Moving Mass	Mms	-
Suspension Compliance	Cms	-
Effective Piston Diameter	D	29 mm - 1,142 in
Effective piston area	Sd	6,5 cm <sup>2</sup> - 1,01 sq.in
Voice Coil Inductance @ 1kHz	Le	-

### MOUNTING AND SHIPPING INFORMATION

Overall Diameter	62 mm - 2,44 in
Baffle Cutout Diameter	56,5 mm - 2,22 in
Flange Thickness	2,5 mm - 0,1 in
Total Depth	23,5 mm - 0,925 in
Bolt Circle Diameter	- - -
Bolt Holes Quantity and Diameter	- / - - -
Net Weight	- - -
Shipping Units	12 Pairs

### NOTES

- <sup>1</sup> 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated nominal impedance.
- <sup>2</sup> Program Power is defined as 3 dB greater than the Nominal rating.
- <sup>3</sup> Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m, when connected to 2,83V sine wave test signal.
- <sup>4</sup> Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- <sup>5</sup> Linear Math. Xmax is calculated as (Hvc-Hg)/2 + Hg/4 where Hvc is the coil depth and Hg is the gapdepth.
- <sup>6</sup> Frequency response curve is measured on IEC Baffle.
- <sup>7</sup> Impedance curve is measured in free air conditions at small signals.